



Used for D09~95 contactors

MODEL	A	B	C	D	E	a	b	Φ
D09~12	47	76	82	11	133	34/35	50/60	4.5
D18	47	76	87	118	138	34/35	50/60	4.5
D25	57	86	95	126	146	40	48	4.5
D32	57	86	100	131	151	40	48	4.5
D40~65	77	129	116	145	165	40	100/110	6.5
D80~95	87	129	127	175	195	40	100/110	6.5

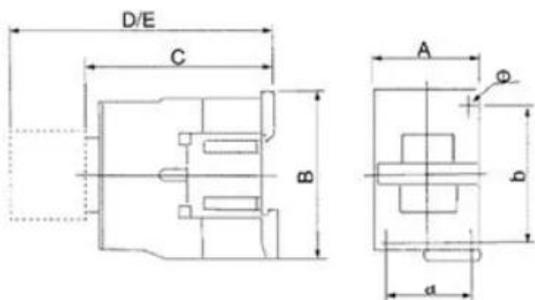

CJK2-09-32

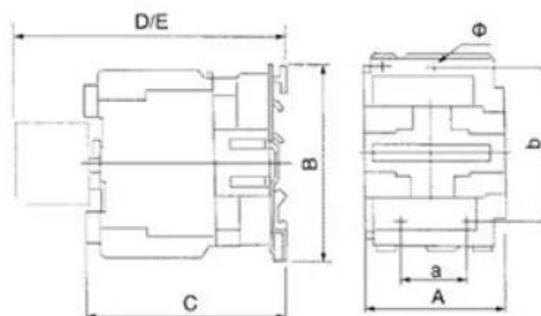

CJK2-40-95

Model Type		09	12	18	25	32	40	50	65	80	95
Rated working current (A)	AC3	9	12	18	25	32	40	50	65	80	95
	AC4	3.5	5	7.7	8.5	12	18.5	24	28	37	44
Three-phase motor AC-3 level (kw)	220/230V	2.2	3	4	5.5	7.5	11	15	18.5	22	25
	380/400V	4	5.5	7.5	11	15	18.5	22	30	37	45
	415V	4	5.5	9	11	15	22	25	37	-	-
	500V	5.5	7.5	10	15	18.5	22	30	37	-	-
	660/690V	5.5	7.5	10	15	18.5	30	33	37	45	45
Rated heating current I _{th} (A)		20	20	32	40	50	60	80	80	125	125
Electrical lifespan (10000 cycles)	AC3	100	100	100	100	80	80	60	60	60	60
	AC4	20	20	20	20	20	15	15	15	10	10
Mechanical lifespan (10000 cycles)		1000	1000	1000	1000	800	800	800	800	600	600
Contact model		3P+NO					3P+NC+NO				
		3P+NO					3P+NC+NO				

CJX2 series product specifications and parameters

Model	Rated current	Main contact	Auxiliary contact	Single phase load power	Three phase load power
CJX2-0910	9A	3NO	1NO	1.8KW	3.5KW
CJX2-0901	9A	3NO	1NC	1.8KW	3.5KW
CJX2-1210	12A	3NO	1NO	2.5KW	5KW
CJX2-1201	12A	3NO	1NC	2.5KW	5KW
CJX2-1810	18A	3NO	1NO	3.5KW	7.5KW
CJX2-1801	18A	3NO	1NC	3.5KW	7.5KW
CJX2-2510	25A	3NO	1NO	5KW	8.5KW
CJX2-2501	25A	3NO	1NC	5KW	8.5KW
CJX2-3210	32A	3NO	1NO	6KW	12KW
CJX2-3201	32A	3NO	1NC	6KW	12KW
CJX2-4011	40A	3NO	1NO 1NC	8KW	18.5KW
CJX2-5011	50A	3NO	1NO 1NC	10KW	24KW
CJX2-6511	65A	3NO	1NO 1NC	12.5KW	28KW
CJX2-8011	80A	3NO	1NO 1NC	15.5KW	37KW
CJX2-9511	95A	3NO	1NO 1NC	18.5KW	44KW

Contact: XX10 (NO)/XX01 (NC)/XX11 (1NO and 1NC)